



PALLET TRUCK PAINTED

Hydraulic hand pallet truck 2500 kg and 3000kg

The hand pallet trucks are light and maneuverable; they have a small turning radius and are easy to operate.

They are supplied with smooth-running nylon wheels or extra-soft polyurethane wheels.

Both models have a simple and reliable hydraulic system with built-in automatic neutral position valve.

They have sturdy, rounded forks. The construction of the tiller arm is strong and conical. The ergonomically correct shape of the steering handle makes operation easy from all angles.

The relief hand lever is integrated in the tiller arm, which also functions as a pump arm. The relief lever controls the lowering valve and hence the lowering speed, which will vary proportionally with the movement of the relief lever. When the tiller arm is released it will automatically return to a vertical position.



SPECIFICATIONS

Hydraulic System

The manually operated lift pump is simple and reliable in operation. The hard chromed, polished pistons are resistant to rust, scratches and strokes. The pump is double sealed which secures efficiently against leakages and prolongs the life of the seals. The lift cylinder is welded directly onto the pump, and the oil reservoir is welded around the lift cylinder. This means efficient tightness and eliminates tube and hose connections.

The hand pallet truck is equipped with a neutral position valve as standard. When the tiller arm is moved slowly, the neutral position ensures that the load is not lifted (driving position). When the tiller arm is moved a little faster, the load is lifted the usual way (lifting function). The system is simple, adjustable and reliable in operation.

Wheels

The steering wheels of all models can turn 110° to either side. They are suspended in an articulating shaft, which ensures that all 3 wheel sets have full road contact. The entry wheels are facilitating cross-entering in pallets with bottomboards.


Options

The hand pallet trucks can be supplied with parking brake and skid frame for pallets with extra great height above the floor.

Special Versions

The hand pallets truck can be tailored with the following possibilities:

- Minimum fork length: 400mm
- Maximum fork length: 3000mm
- Minimum outside fork spread: 320mm
- Maximum outside fork spread: 1500mm
- Sloping forks for handling of paper rolls

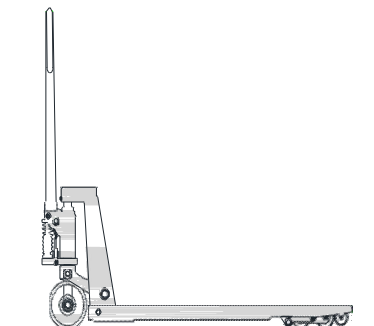

SIA R.A.S.A. un Ko

Serviss-noliktava: Ganību dambis 40K, Rīga, LV-1005

e-pasts: info@rasa.lv

tel. 67860007

MODEL RH25

Specifications:

Capacity	2500kg.
Outside width std	520mm
Fork length std	1130mm
Lowest fork height	85mm.
fted height unloaded	200mm.
Width on fork	160mm.
Steering angle	220°.
Steering wheel	Ø180mm.
Load wheel single or double	Nylon
Wheel standard	per
Lifting stroke	high 11mm
Weight	70kg.

MODEL RH30

Specifications:

Capacity	3000kg.
Outside width std	520mm
Fork length std	1130mm
Lowest fork height	85mm.
fted height unloaded	200mm.
Width on fork	160mm.
Steering angle	220°.
Steering wheel	Ø180mm.
Load wheel single or double	Nylon
Wheel standard	per
Lifting stroke	high 11mm
Weight	80kg.



Tel. (+45) 56 93 36 00 . Fax (+45) 56 93 36 03

E-mail:

info@almeborg.com www.almeborg.com



The products comply with EC directives

Subject to change in the structure reserved. Made in Denmark