


2500 (Recommended)

2550

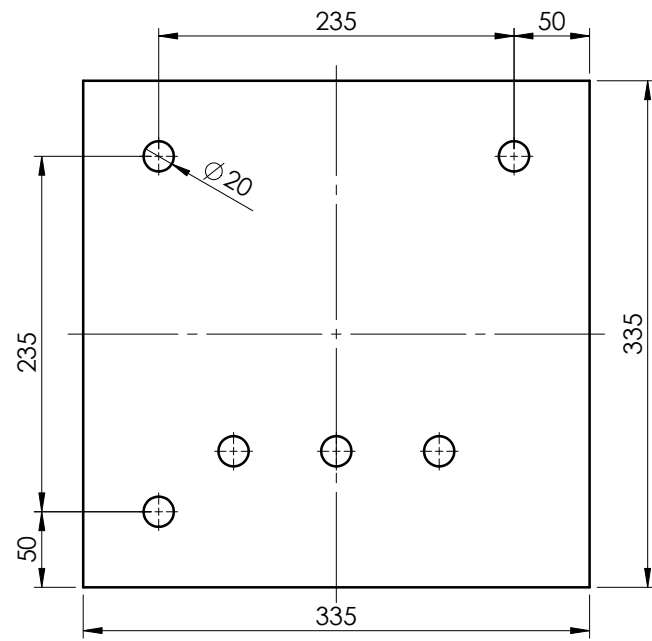

A*	B1	B2	C1	C2
2400	3050	3390	min 3165	min 3505
2500	3150	3490	min 3265	min 3605
2600	3250	3590	min 3365	min 3705

*Selecting a spacing, make sure that it contains the appropriate separation from the vehicle tires

Design and preparation of the substructure (ground) by other

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: EN 22768 - m, k EN 13920 - B, F		FINISH:	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
DRAWN M. Kozielczyk		SIGNATURE	DATE 15-03-2010	MATERIAL:	
CHK'D				TITLE: Wheel guides Flanged	
APPV'D				DWG NO.	PEF 2550
MFG				A3	
Q.A.				SCALE:1:20	
WEIGHT:		PROM STAHL GmbH Ronnenberger Straße 20 30989 Gehrden		SHEET 2 OF 3	