


## Edge of platform


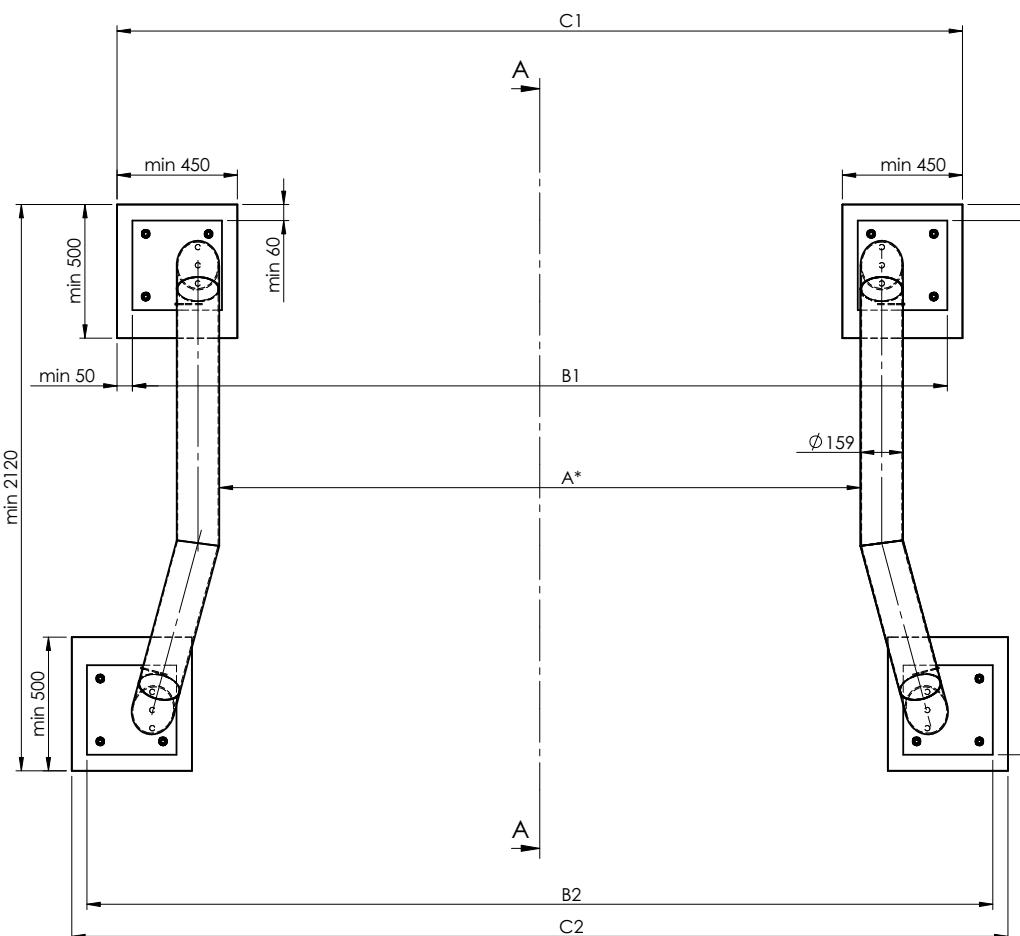


2500 (Recommended)

2000

A-A

— Wheel guides mount with: 6 anchors  
6 nuts M16 and 6 washers A2  
Anchors such as PE-KMM16x150

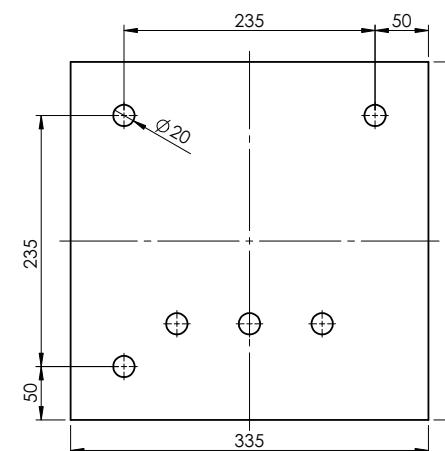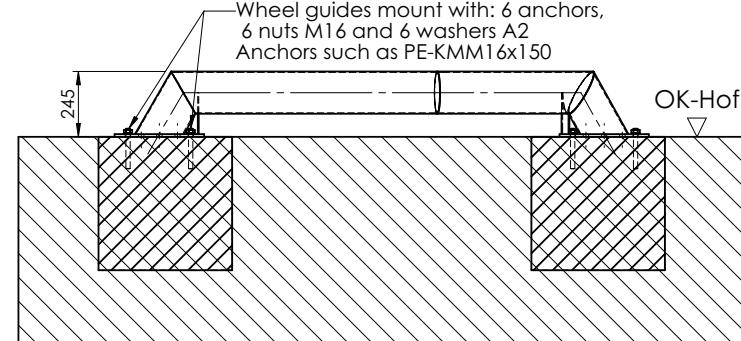

	A*	B1	B2	C1	C2
2400	3050	3390	min 3165	min 3500	
2500	3150	3490	min 3265	min 3600	
2600	3250	3590	min 3365	min 3700	

\*Selecting a spacing, make sure that it contains the appropriate separation from the vehicle tires

Design and preparation of the substructure (ground) by other

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: EN 22768 - m, k EN 13920 - B, F		FINISH:		DEBIR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION
DRAWN	M. Kozielczyk	SIGNATURE	DATE		MATERIAL:		
CHK'D			21-06-2010	 <b>PROMSTAHL</b> GmbH  <b>PROMStahl</b> GmbH Ronnenberger Straße 20 30989 Gehrden	TITLE:		
APP'D					Wheel guides		
MFG					Flanged		
Q.A.							
					DWG NO.		
					<b>PEF 2000</b>		
				SCAIE 1:20		A3	
				WEIGHT:		SHEET 2 OF 3	